


250T SPREADER BAR END CAP

Maxirig

QUALITY LIFTING SOLUTIONS

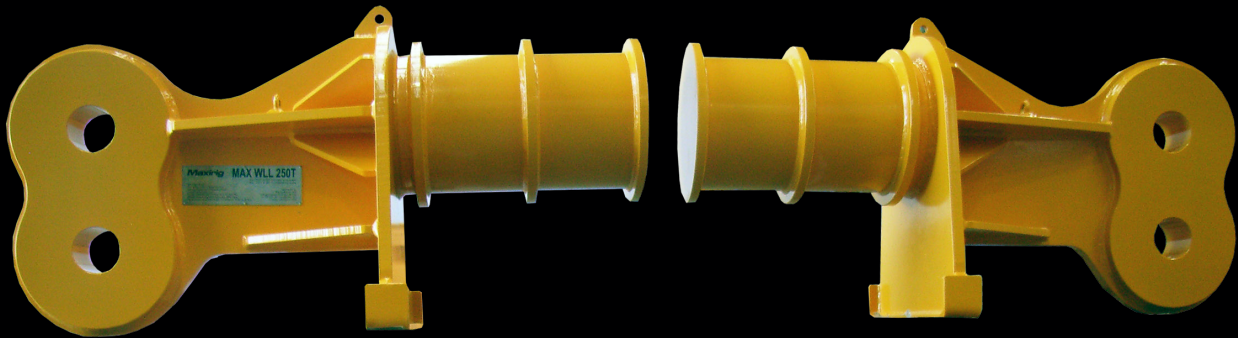


The Maxilug 250 allows users to create their own custom length, heavy-lift spreader bar utilizing these heavy duty end units. Designed to accommodate readily available line pipe, Maxirig can supply the units as is or with various pipe lengths to facilitate lift spans from 2 metres up to 13.2 metres.

MAXIRIG PRODUCT CODE
MAXILUG250

Capacity:	250 Tonne at 60° / 160 Tonne at 90°
Tare Weight:	600Kg each / 1200Kg per pair (excludes pipe or rigging)
Lifting Lugs (top) suit:	150 Tonne Grade 'S' safety bow shackle
Load Lugs (lower) suit:	150 Tonne Grade 'S' safety bow shackle
Intermediate Pipe:	457mm OD x 12.7mm Wall C350LO (139Kg / MTR)

PRODUCT ASSURANCE	
Parent Standard:	AS4991 - 2004
Proof Load Testing	Yes
MPI Weld Inspection	Yes
Manufacturer's Guarantee	1 Year

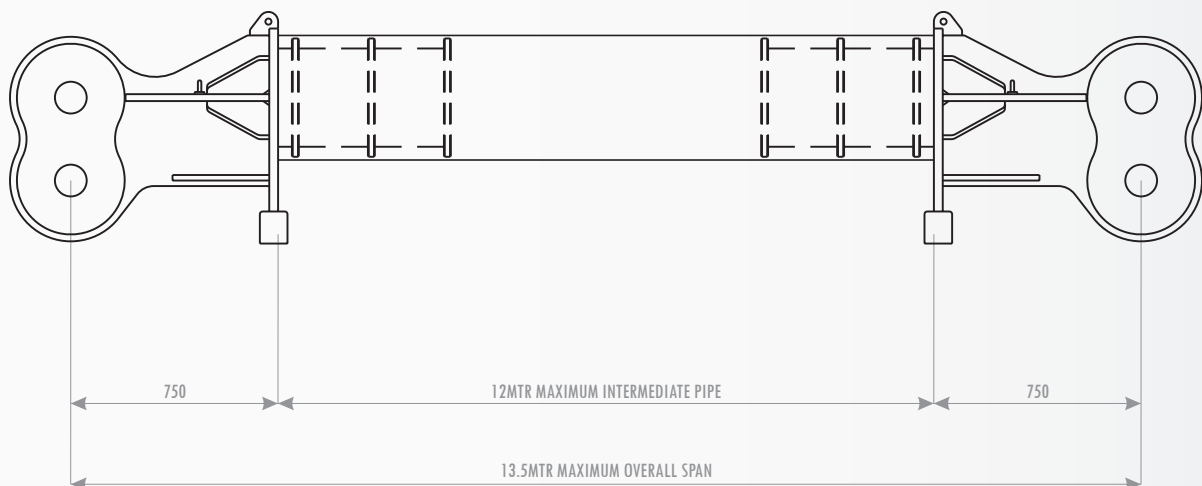

WE PROVIDE SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE

All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers and boilermakers.

VISIT WWW.MAXIRIG.COM.AU